


POWER AND SIGNAL LEGEND		LIGHTING & EQUIPMENT LEGEND	
⊕ SINGLE POLE SWITCH	⊕ TELEPHONE JACK	⊕ CHANDELIER	⊕ UNDERCOUNTER LIGHT
⊕ TWO WAY SWITCH	⊕ FLOOR PHONE JACK	⊕ PENDANT	⊕ SINGLE BULB STRIP FLUOR.
⊕ THREE WAY SWITCH	⊕ CABLE TV & POWER (ONE BOX)	⊕ WALL MOUNTED FIXTURE	⊕ FLUORESCENT 6x48
⊕ SWITCH WITH DIMMER	⊕ INTERCOM	⊕ CEILING MOUNTED FIXTURE	⊕ FLUORESCENT 2 X 2
⊕ AUTOMATIC DOOR SWITCH	⊕ SPEAKER	⊕ PREMIUM REC. FIXTURE	⊕ TRACK LIGHT
⊕ DUPLEX CONV. OUTLET	⊕ SECURITY PANEL	⊕ MID-RANGE REC. FIXTURE	⊕ FLOOD LIGHT
⊕ QUADRUPLE CONV. OUTLET	⊕ THERMOSTAT	⊕ MONOPONT FIXTURE	⊕ LOW VOLTAGE LIGHT
⊕ WATERPROOF OUTLET	⊕ SMOKE DETECTOR	⊕ RECESSED FIXTURE	⊕ EXHAUST FAN
⊕ GFI CONV. OUTLET W/ GFI	⊕ KEYPAD (BY OTHERS, LOW VOLTAGE)	⊕ RECESSED ADJ. FIXTURE	⊕ EXHAUST FAN W/ LIGHT
⊕ CONV. OUTLET W/ UPPER RECEPTACLE SWITCHED		⊕ WATERPROOF FIXTURE	⊕ SMOKE DETECTOR
⊕ 220V OUTLET		⊕ SHOWER LIGHT/HEAT LAMP	⊕ MOTION DETECTOR
⊕ FLOOR OUTLET FLOOR		⊕ CEILING FAN	⊕ GARBAGE DISPOSAL

Note: Electrical outlets illustrated are required by the Owner. Contractor shall install additional outlets as required by all applicable codes. All exterior fixtures shall be rated for exterior conditions. Coordinate telephone, computer, and cable structure wiring with Owner.

Note: Lighting fixture count and location are for design purposes only. All exterior fixtures shall be rated for exterior conditions. Contractor shall verify any additional lighting requirements by codes, and verify location of all fixtures with Architect prior to installation.

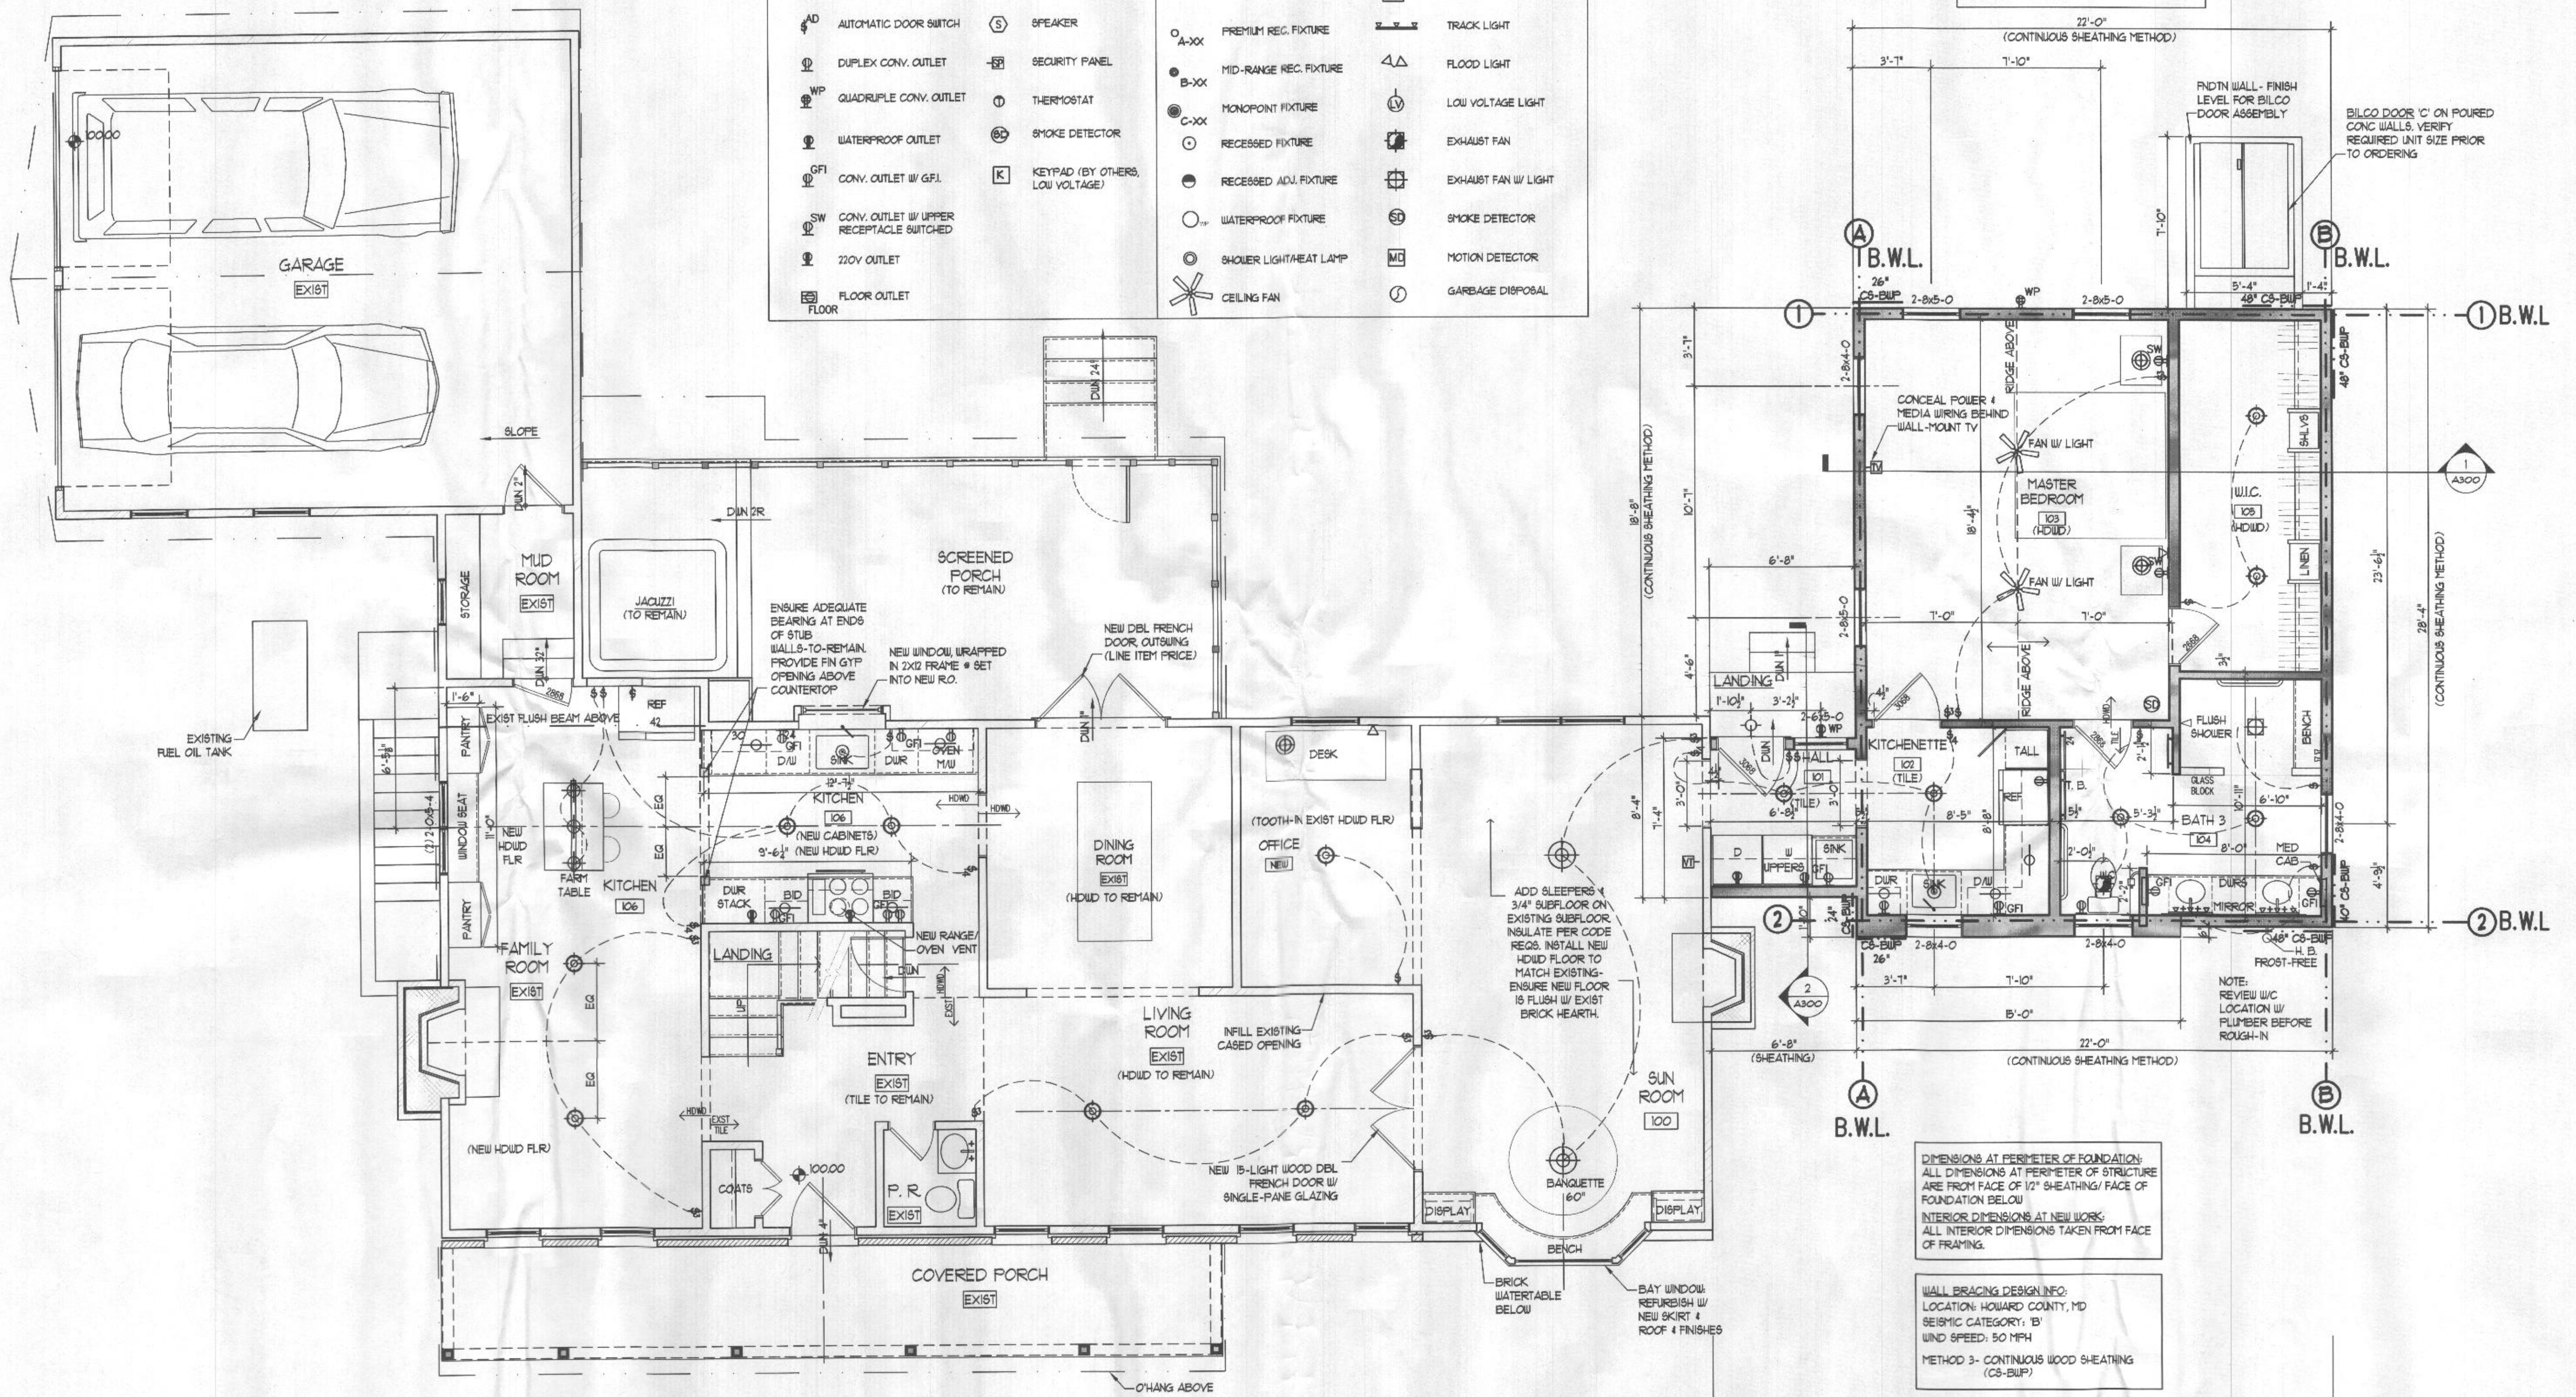

DIMENSIONS AT PERIMETER OF FOUNDATION: ALL DIMENSIONS AT PERIMETER OF STRUCTURE ARE FROM FACE OF 1\"/>

DIMENSIONS AT PERIMETER OF FOUNDATION: ALL DIMENSIONS AT PERIMETER OF STRUCTURE ARE FROM FACE OF 1\"/>

WALL BRACING DESIGN INFO:
 LOCATION: HOWARD COUNTY, MD
 SEISMIC CATEGORY: 'B'
 WIND SPEED: 50 MPH
 METHOD 3- CONTINUOUS WOOD SHEATHING (CS-BUP)

NOTES TO GENERAL CONTRACTOR:

1. VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS, INCLUDING CONCEALED WORK AT LOCATIONS OF PROPOSED WORK, AND NOTIFY ARCHITECT OF ANY DISCREPANCY PRIOR TO COMMENCEMENT OF WORK.
2. EXISTING MAIN ROOF STRUCTURE IS TO REMAIN. ENSURE THAT CONTINUOUS BEARING BLOCKS HAVE BEEN INSTALLED IN FLOOR PLUMBS AT INTERIOR BEARING POINTS.
3. INCORPORATE STRUCTURAL FRAMING NOTES FROM SHEET 'GLO'.

1 FIRST FLOOR PLAN- SHOWING PROPOSED ADDITION
 1/4" = 1'-0"

REV.	DATE	REVISIONS

JORDAN-RENSHAW RESIDENCE


PROJECT ADDRESS:
 14526 MacClintock Drive
 Glenwood, MD 21738

PROPOSED FLOOR PLAN WITH EXISTING WORK

PERMIT SET

SCALE: AS INDICATED
 DATE: 03.08.17
 DRAWN BY: [] CHECKED BY: []

A1.01

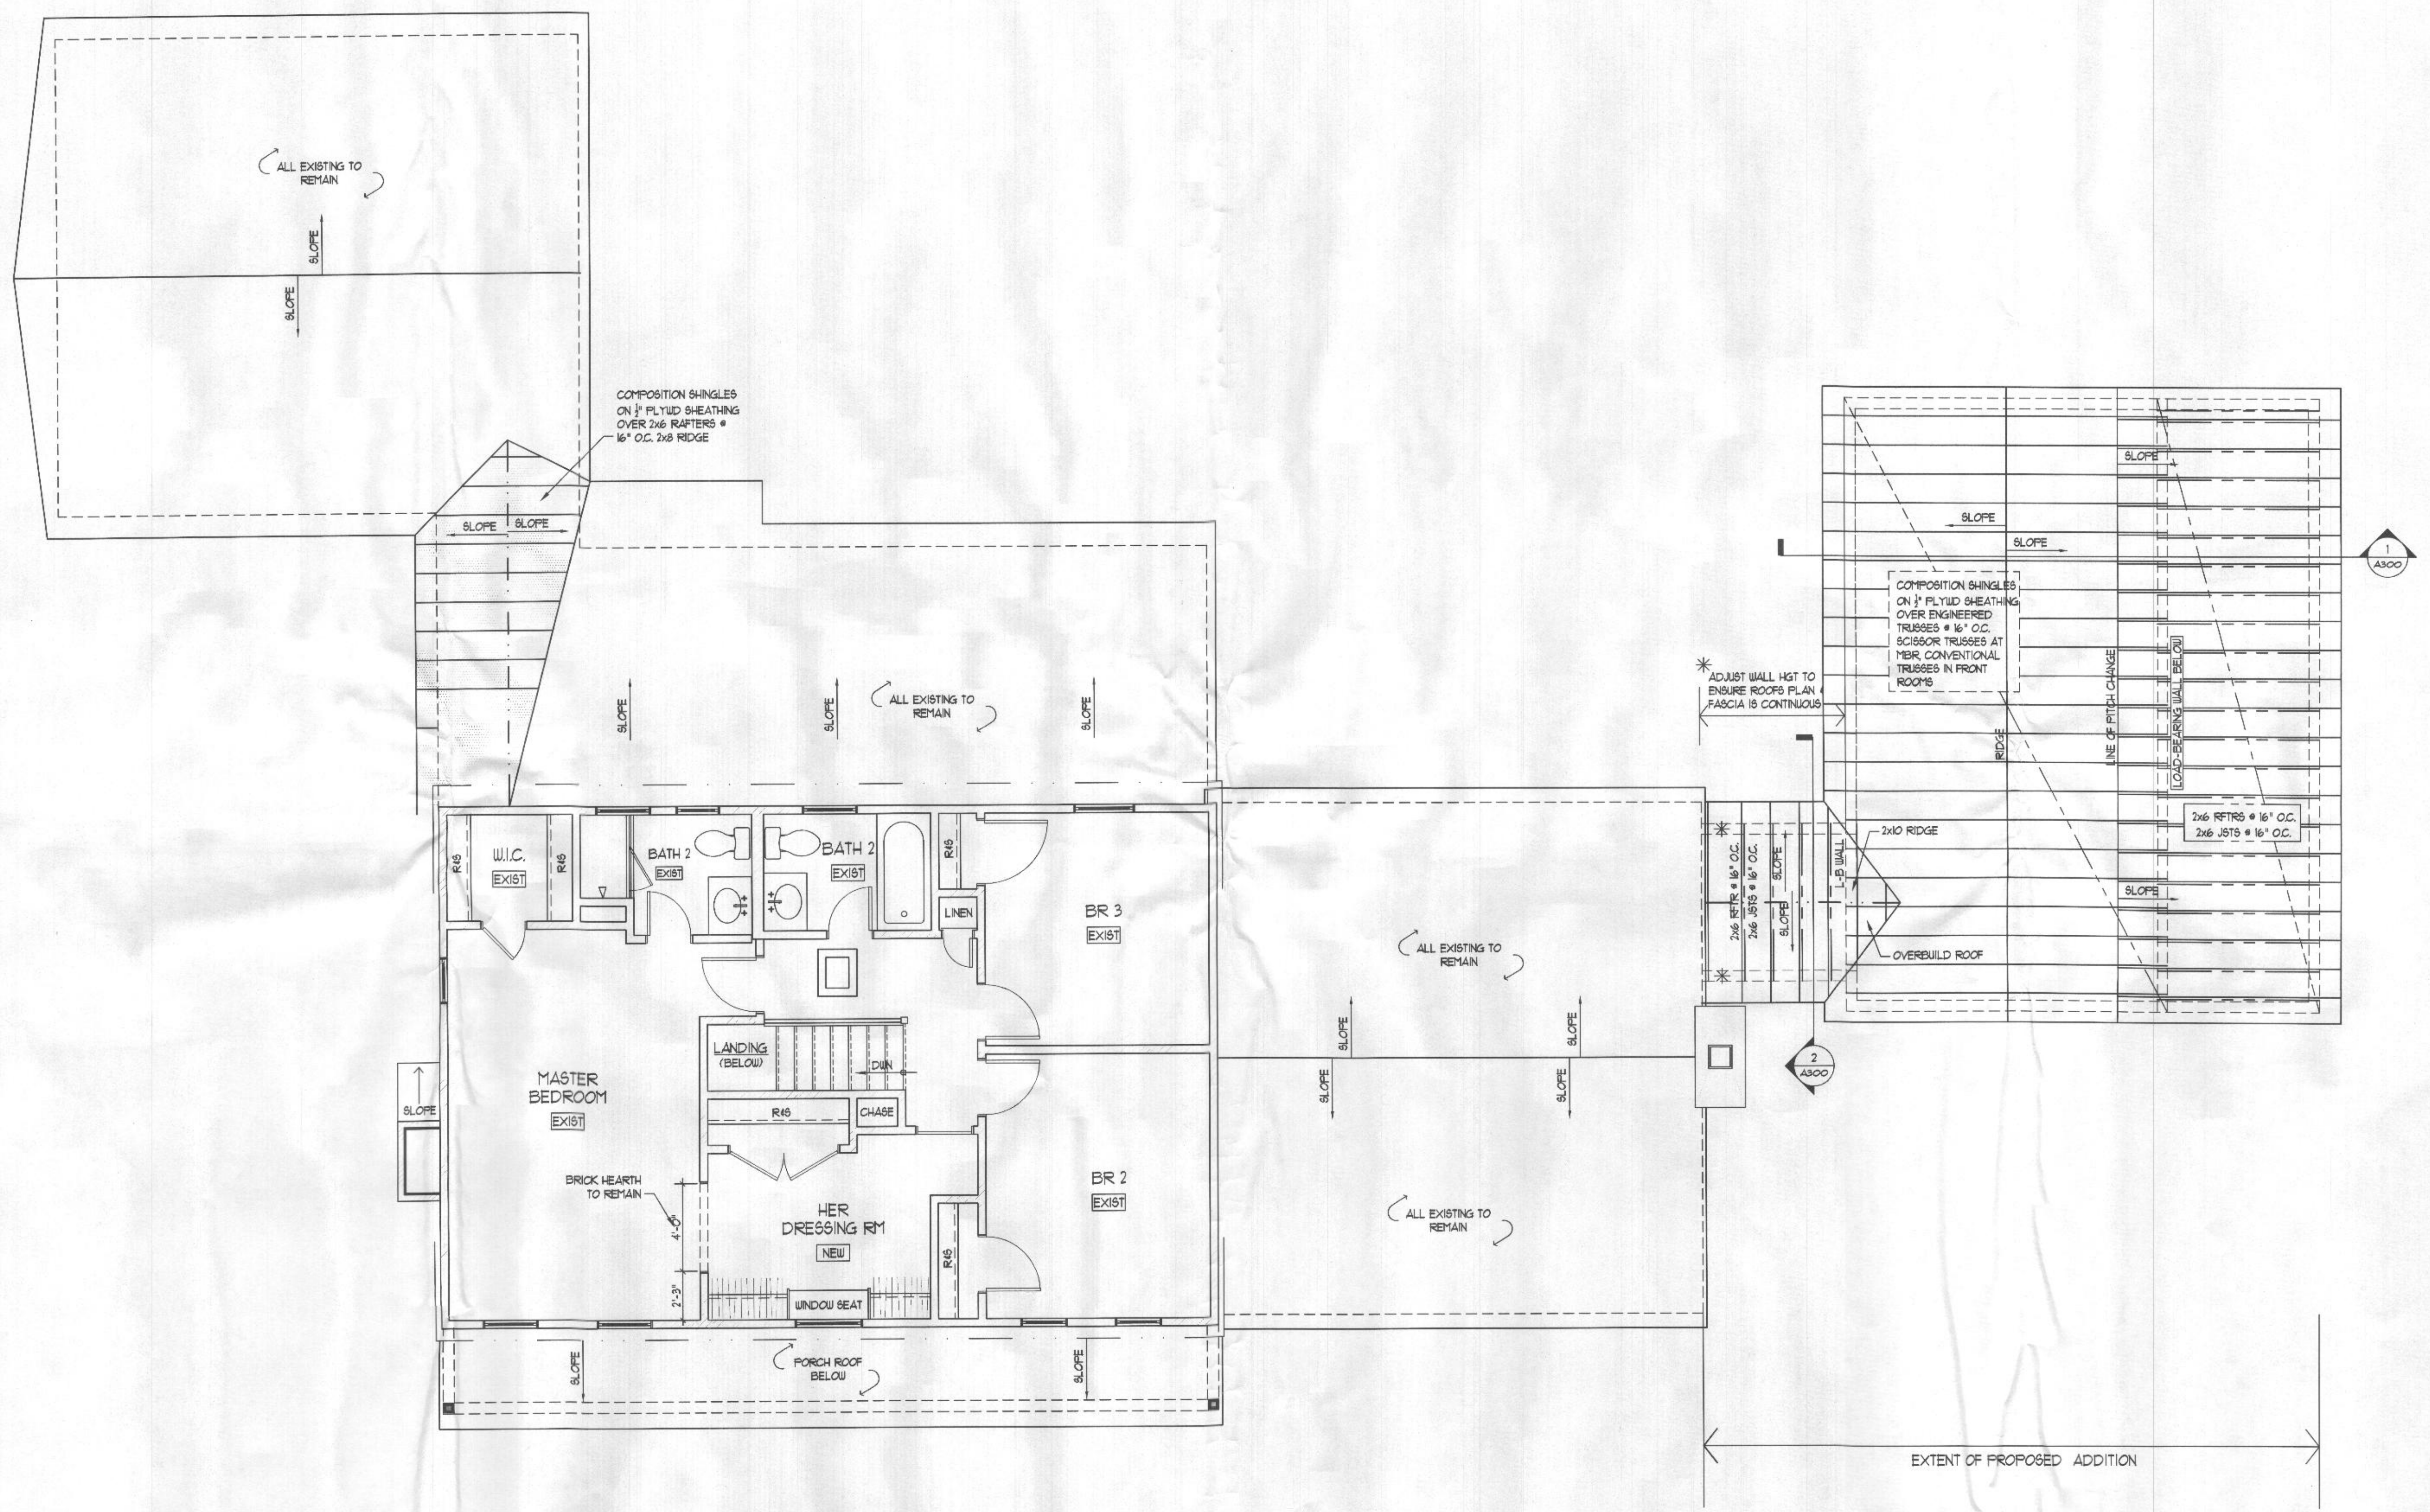

1 SECOND FLOOR PLAN- SHOWING PROPOSED ADDITION ROOFS BELOW
1/4" = 1'-0"

REV.	DATE	REVISION

PROJECT NAME: **JORDAN-RENSHAW RESIDENCE**

PROJECT ADDRESS: 14526 MacClintock Drive
Glenwood, MD 21738

DRAWING NAME: **PROPOSED ROOF WITH EXISTING 2ND FLR**

PERMIT SET

SCALE: AS INDICATED

DATE: 03.08.17 JOB NO.:

DRAWN BY: CHECKED BY:

A1.02


REV.	DATE	REVISIONS

PROJECT NAME: **JORDAN-RENSHAW RESIDENCE**
 PROJECT ADDRESS: 14526 MacClintock Drive
 Glenwood, MD 21738

DRAWING NAME: **PROPOSED & EXISTING ROOF PLAN**

PERMIT SET
 SCALE: AS INDICATED
 DATE: 03.08.17 JOB NO.:
 DRAWN BY: CHECKED BY:

A1.03

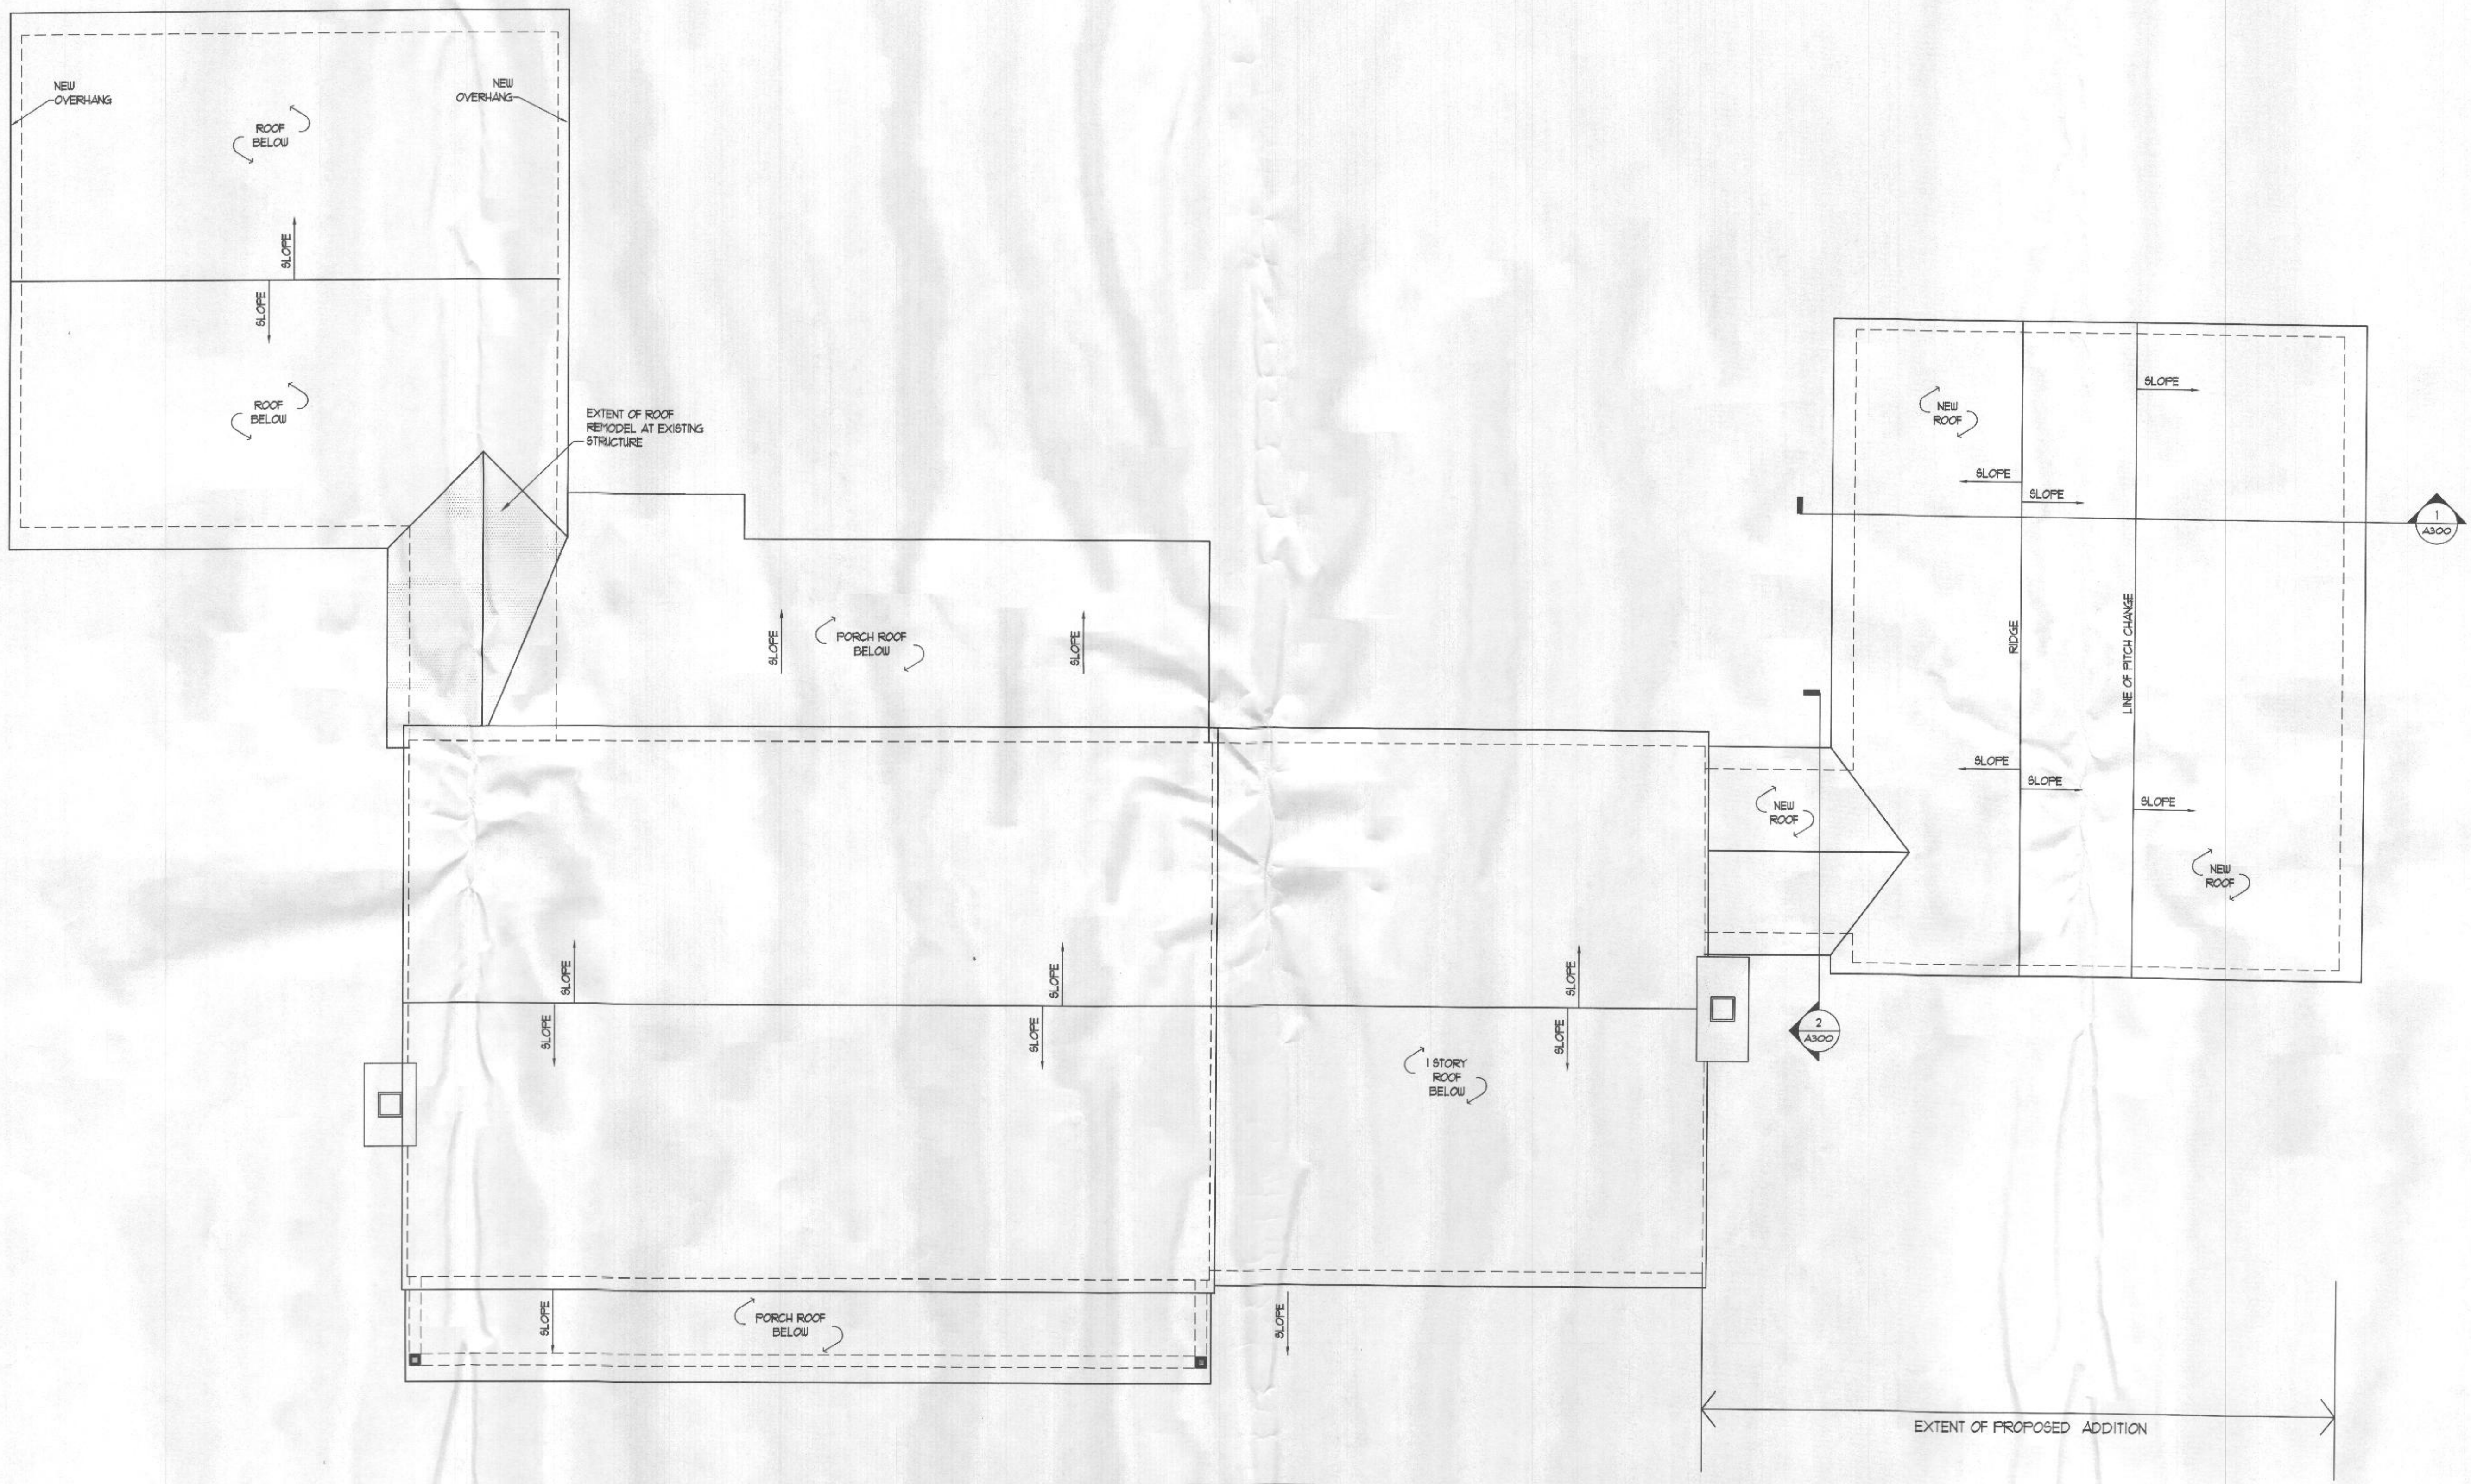

1 SECOND FLOOR PLAN- SHOWING PROPOSED ADDITION ROOF
 1/4" = 1'-0"

GENERAL NOTE:
 NEW COMPOSITION
 SHINGLES AT EXISTING
 AND PROPOSED WORK



1 PROPOSED FRONT ELEVATION
1/4" = 1'-0"



2 EXISTING FRONT ELEVATION
1/4" = 1'-0"

ROOFING NOTES:

- STRIP EXISTING ROOFS TO BARE PLYUD.
- INSPECT & REPLACE DAMAGED ROOF SHEATHING (ADD 165/SHEET)
- PROVIDE UNDERLAYMENT & SELF-ADHERING SHEET UNDERLAYMENT
- PROVIDE CERTAINTED 'LANDMARK' SHINGLES
- PROVIDE ALTERNATE PRICE FOR 'LANDMARK PRO' SERIES SHINGLES
- PROVIDE CONTINUOUS RIDGE VENT
- PROVIDE ALL ACCESSORIES AS RECOMMENDED BY MANUFACTURER
- PROVIDE ALL FLASHINGS, COUNTERFLASHINGS & ACCESSORIES REQUIRED FOR A COMPLETE, WATERTIGHT AND WATERPROOF INSTALLATION. MATERIAL TO BE .019" GAUGE

SIDING NOTES:

- REMOVE EXISTING SIDING & ACCESSORIES
- PROVIDE TYVEK OR EQUIV VAPOR-BARRIER
- PROVIDE CERTAINTED 'MAIN STREET' SIDING STYLE TBD
- PROVIDE CERTAINTED 'INVENT' SOFFIT
- ALL VINYL PRODUCT COLORS TBD
- PROVIDE ADD/ALTERNATE PRICE TO UPGRADE TO CERTAINTED 'MONOGRAM' PRODUCT
- PROVIDE ALL ACCESSORIES AS RECOMMENDED BY MANUFACTURER
- PROVIDE ALL FLASHINGS, COUNTERFLASHINGS & ACCESSORIES REQUIRED FOR A COMPLETE, WATERTIGHT AND WATERPROOF INSTALLATION.
- REMOVE EXISTING ALUMINUM WRAP OF EXTERIOR WOOD FINISHES AT EXIST HOUSE. INSTALL NEW .019" PREFINISHED ALUMINUM WRAP AT ALL EXPOSED WOOD TRIM, AND AT AREAS INDICATED ON PERMIT WALKTHROUGH SET, AND APPROVED BY GC AND OWNER
- ALL SCREEN PORCH FINISHES SHALL BE EXCLUDED

SHUTTER NOTES:

- FURNISH VINYL SHUTTERS AT ALL LOCATIONS IDENTIFIED IN PROPOSED ELEVATION DRAWINGS
- STYLE TO BE 'RAISED-PANEL', COLOR TBD.
- SIZE SHUTTERS SO THAT THE COMBINED WIDTH OF A PAIR OF SHUTTERS IS AS CLOSE AS POSSIBLE TO FINISHED WINDOW WIDTH

GUTTER & DOWNSPOUT NOTES:

- PROVIDE 5" K-STYLE FACTORY-FINISHED CONTINUOUS (FORMED IN FIELD) GUTTERS, .021 GAUGE, COLOR TBD
- ATTACH GUTTERS TO FIRMLY-ANCHORED SUPPORTS SPACED NO MORE THAN 24" O.C.
- PROVIDE 4" RECTANGULAR DOWNSPOUTS, SPECS TO MATCH GUTTERS

PAINTING NOTES:

- PREP ALL EXISTING PTD WOOD COMPONENTS FOR REPAINTING
- ENSURE THAT ALL NEW WOOD TRIM IS BACK-PRIMED PRIOR TO INSTALLATION
- PROVIDE ONE PRIMER COAT AND 2 FINISH COATS OF LATEX PAINT.
- SUBMIT PAINT MANUFACTURER TO OWNER FOR APPROVAL PRIOR TO PURCHASING MATERIAL.
- CALK AT ALL WOOD TRIM SHALL BE APPLIED AFTER APPLICATION OF PRIME COAT TO ENSURE BEST BONDING

REV.	DATE	REVISIONS

**JORDAN-RENSHAW
RESIDENCE**
14526 MacClintock Drive
Glenwood, MD 21738

PROJECT NAME:
PROJECT ADDRESS:


**EXISTING & PROPOSED
FRONT ELEVATIONS**

DRAWING NAME:


PERMIT SET

SCALE: AS INDICATED
DATE: 03.08.17 JOB NO.:
DRAWN BY: CHECKED BY:

A2.01

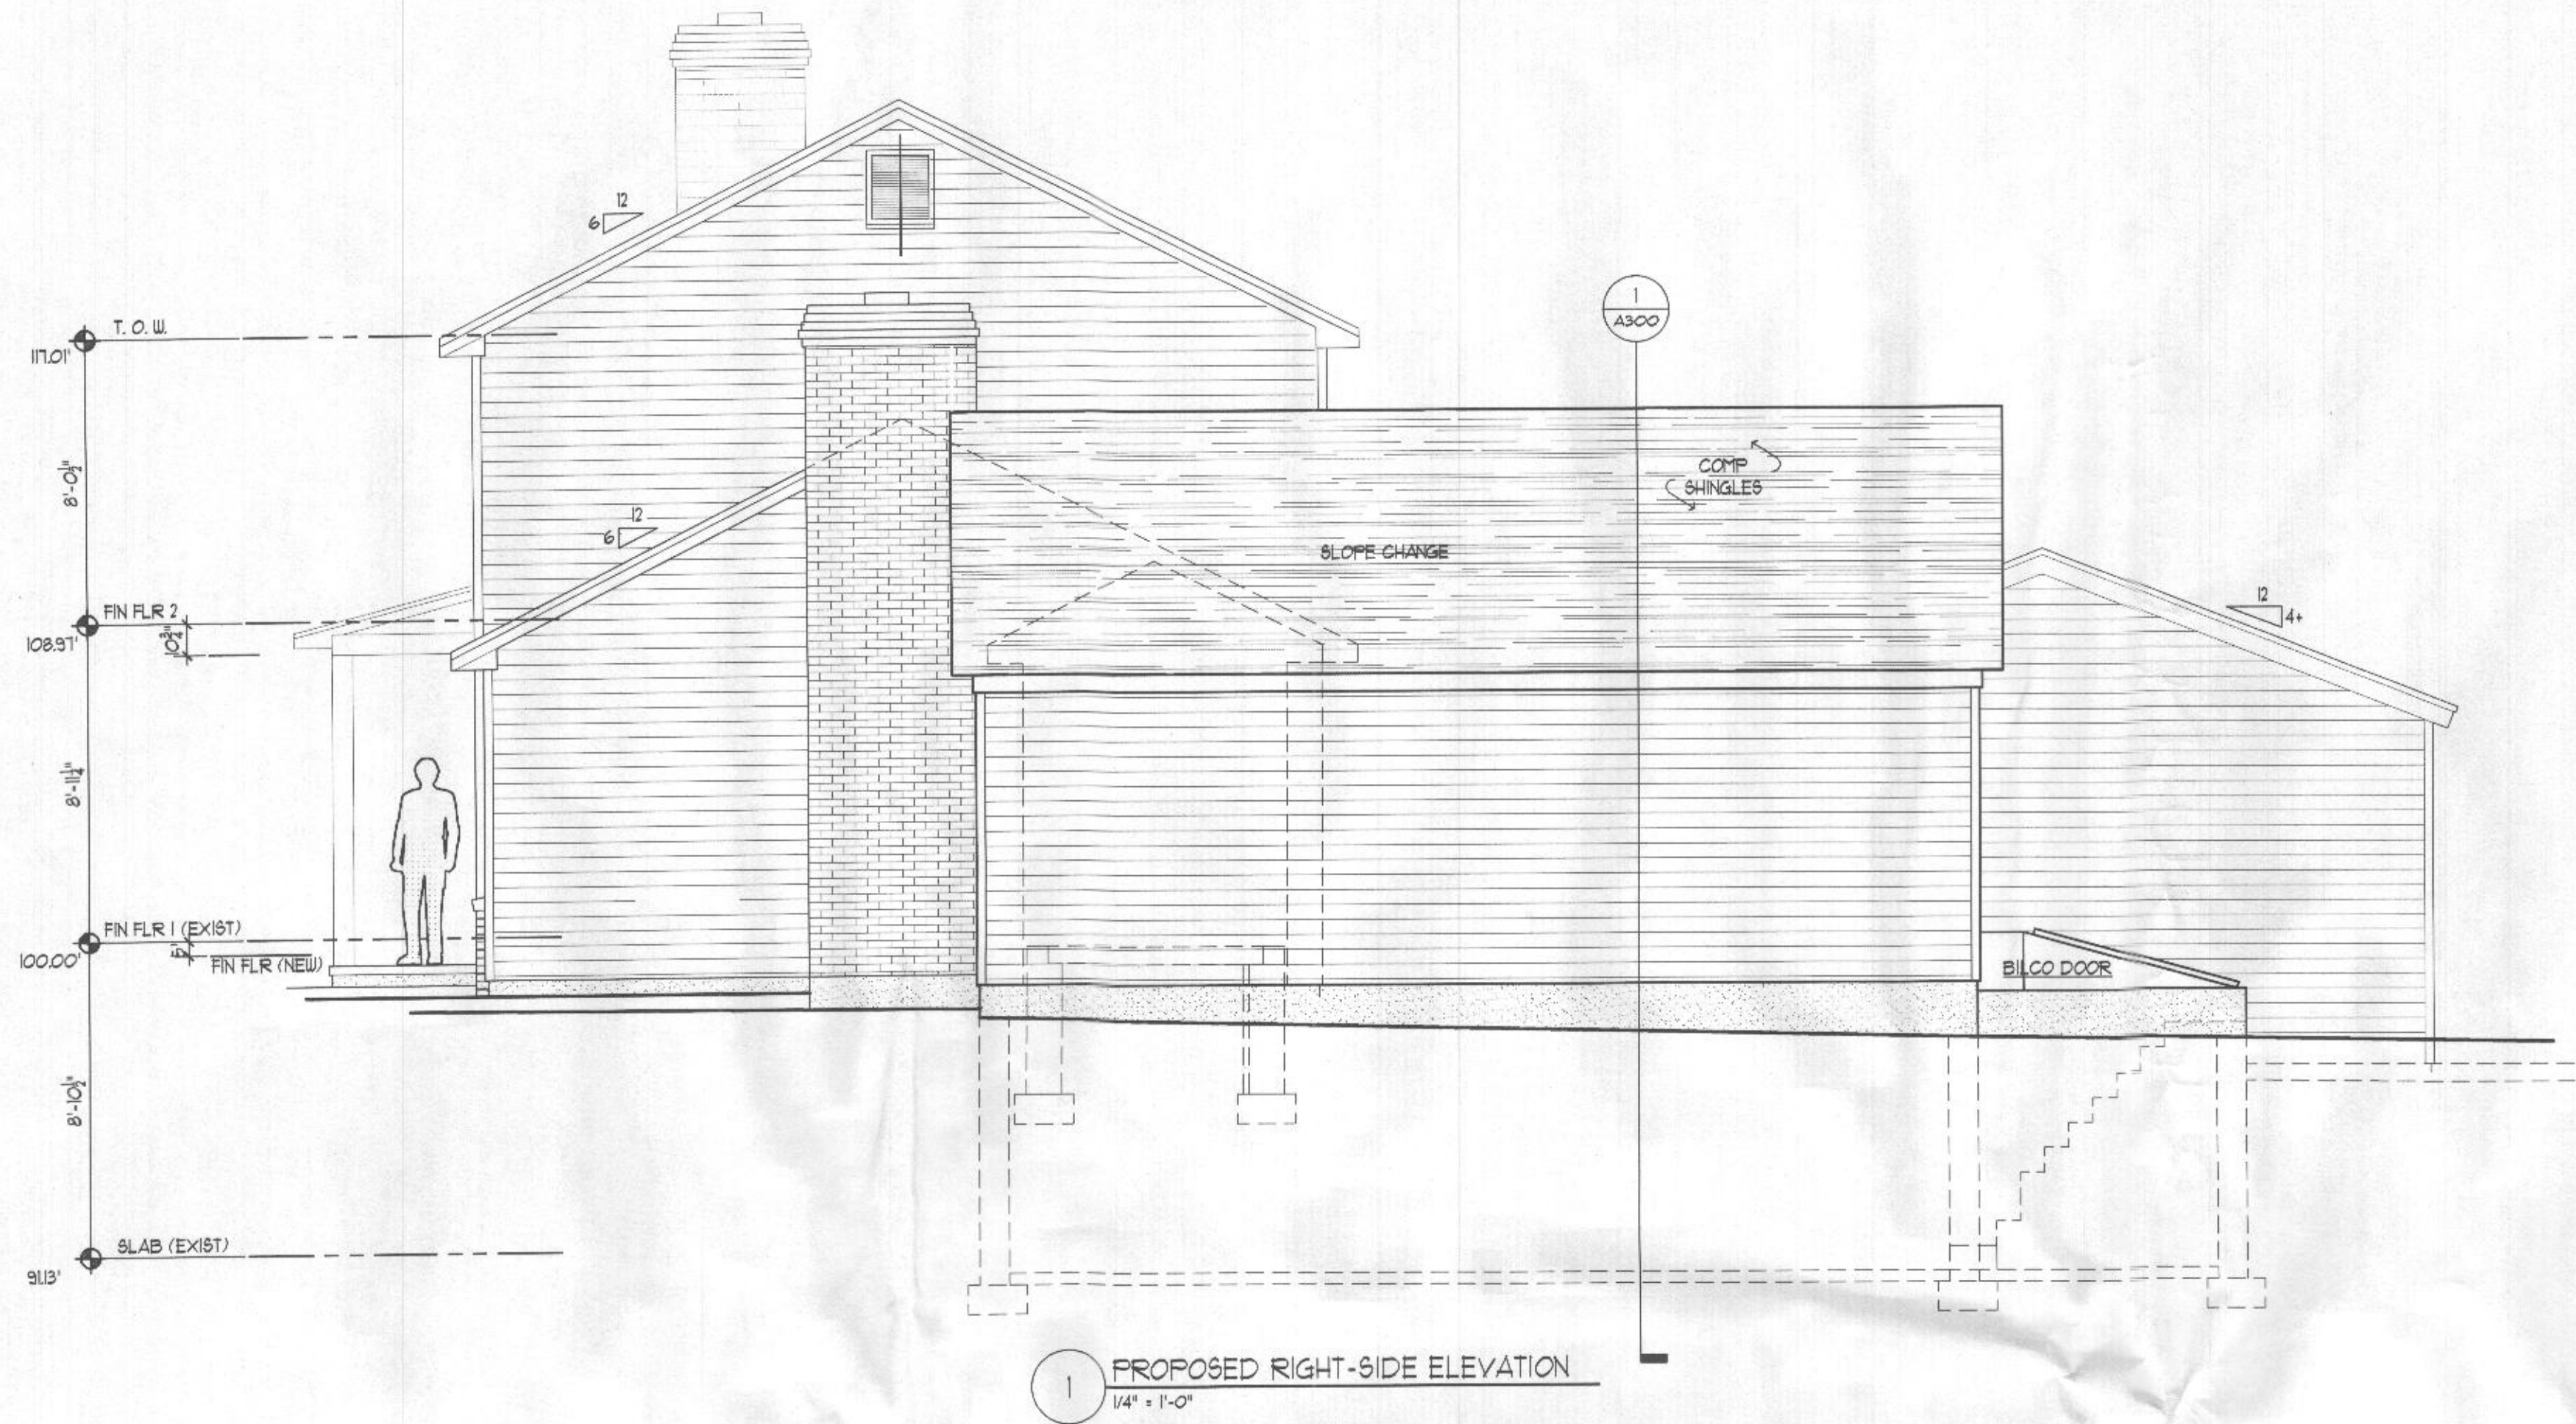

1 PROPOSED RIGHT-SIDE ELEVATION
1/4" = 1'-0"

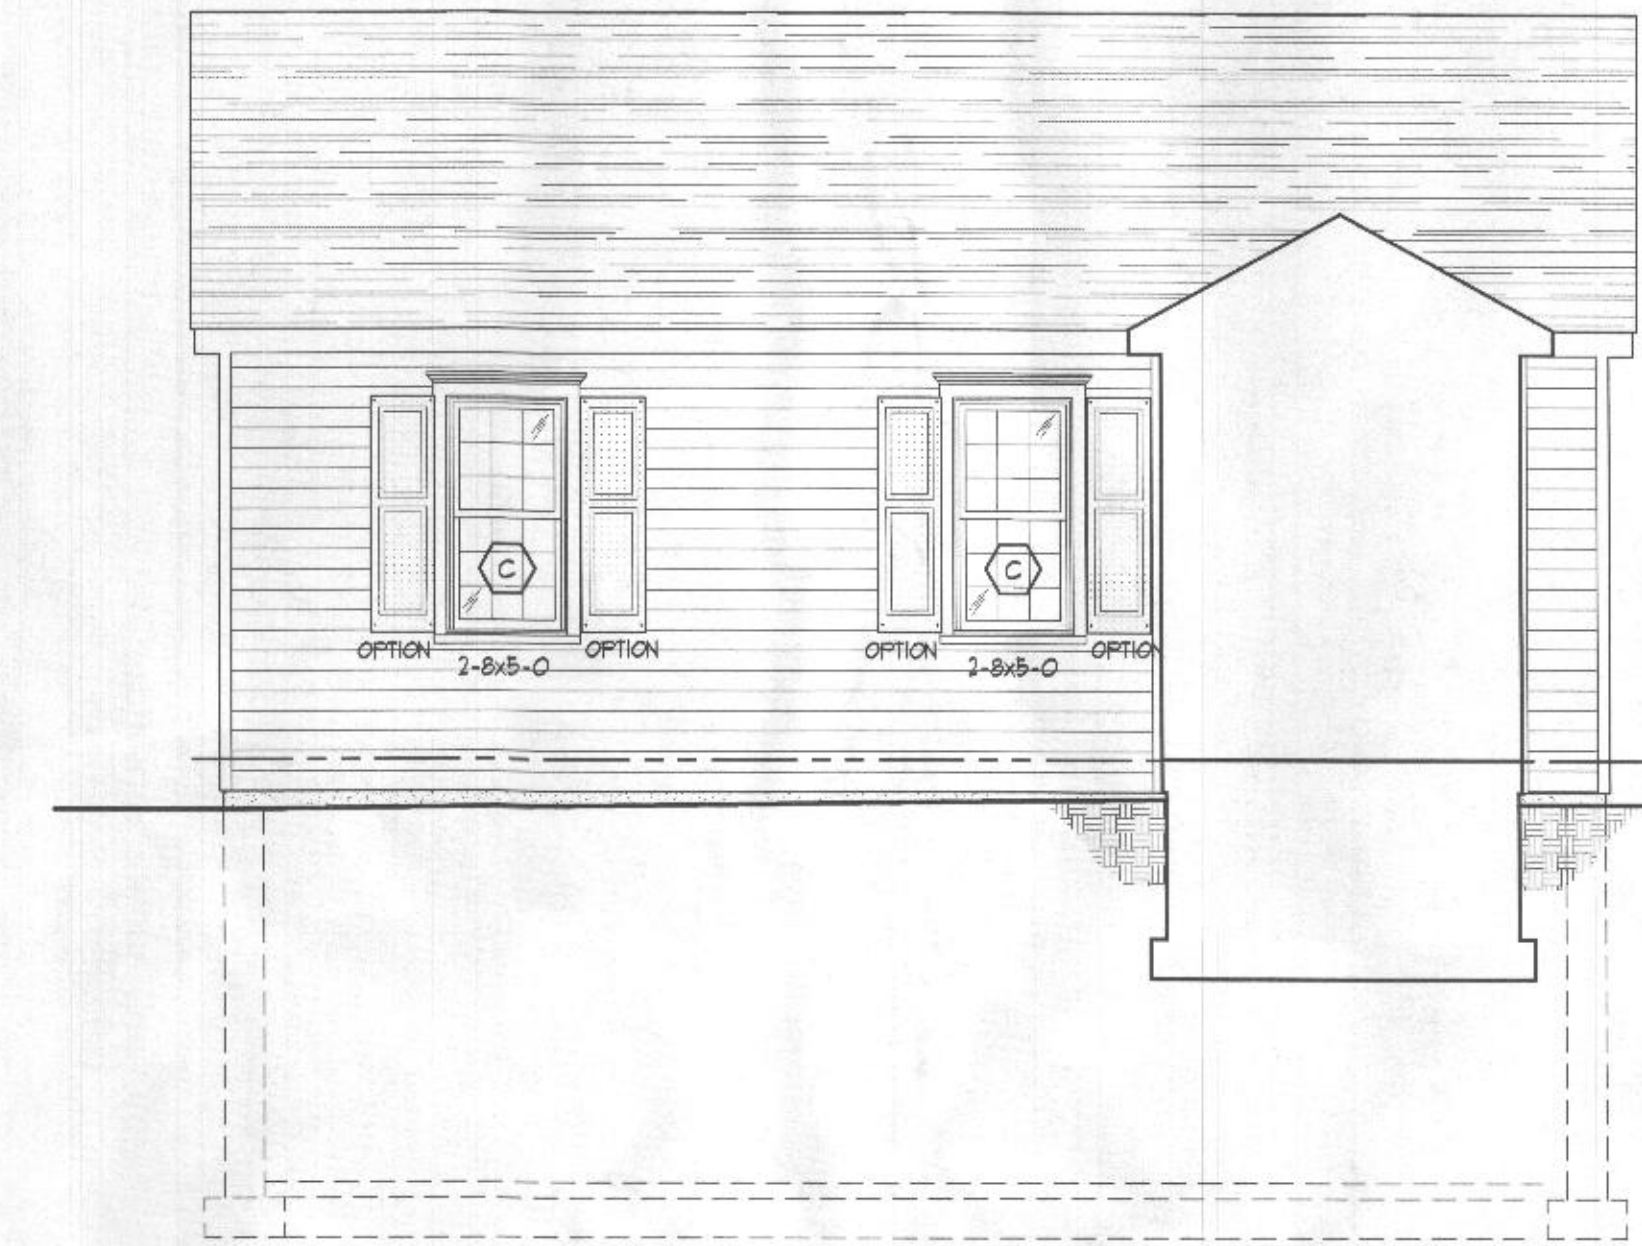

1 PROPOSED ELEV @ ADDITION - BACK YARD
1/4" = 1'-0" ('HIDDEN VIEW')



2 EXISTING RIGHT-SIDE ELEVATION
1/4" = 1'-0"

ROOFING NOTES:

- STRIP EXISTING ROOFS TO BARE PLYWOOD
- INSPECT & REPLACE DAMAGED ROOF SHEATHING (ADD 26\$/SHEET)
- PROVIDE UNDERLAYMENT & SELF-ADHERING SHEET UNDERLAYMENT
- PROVIDE CERTANTEED 'LANDMARK' SHINGLES
- PROVIDE ALTERNATE PRICE FOR 'LANDMARK PRO' SERIES SHINGLES
- PROVIDE CONTINUOUS RIDGE VENT
- PROVIDE ALL ACCESSORIES AS RECOMMENDED BY MANUFACTURER
- PROVIDE ALL FLASHINGS, COUNTERFLASHINGS & ACCESSORIES REQUIRED FOR A COMPLETE, WATERTIGHT AND WATERPROOF INSTALLATION. MATERIAL TO BE 019' GAUGE

SIDING NOTES:

- REMOVE EXISTING SIDING & ACCESSORIES
- PROVIDE TYVEK OR EQUIV VAPOR BARRIER
- PROVIDE CERTANTEED 'MAIN STREET' SIDING, STYLE TBD
- PROVIDE CERTANTEED 'INVISIBLE' SOFFIT
- ALL VINYL PRODUCT COLORS TBD
- PROVIDE ADD/ALTERNATE PRICE TO UPGRADE TO CERTANTEED 'MONDGRAY' PRODUCT
- PROVIDE ALL ACCESSORIES AS RECOMMENDED BY MANUFACTURER
- PROVIDE ALL FLASHINGS, COUNTERFLASHINGS & ACCESSORIES REQUIRED FOR A COMPLETE, WATERTIGHT AND WATERPROOF INSTALLATION
- REMOVE EXISTING ALUMINUM WRAP OF EXTERIOR WOOD FINISHES AT EXIST HOUSE. INSTALL NEW 019' PREFINISHED ALUMINUM WRAP AT ALL EXPOSED WOOD TRIM AND AT AREAS INDICATED ON PERMIT WALK-THROUGH SET, AND APPROVED BY GC AND OWNER
- ALL SCREEN PORCH FINISHING SHALL BE EXCLUDED

SHUTTER NOTES:

- FURNISH VINYL SHUTTERS AT ALL LOCATIONS IDENTIFIED IN PROPOSED ELEVATION DRAWINGS
- STYLE TO BE RAISED-PANEL, COLOR TBD
- SIZE SHUTTERS SO THAT THE COMBINED WIDTH OF A PAIR OF SHUTTERS IS AS CLOSE AS POSSIBLE TO FINISHED WINDOW WIDTH

GUTTER & DOWNSPOUT NOTES:

- PROVIDE 1/2" K-STYLE FACTORY-FINISHED CONTINUOUS (FORMED IN FIELD) GUTTERS, 021 GAUGE, COLOR TBD
- ATTACH GUTTERS TO FIRMLY-ANCHORED SUPPORTS SPACED NO MORE THAN 24" O.C.
- PROVIDE 4" RECTANGULAR DOWNSPOUTS, 026CS TO MATCH GUTTERS

PAINTING NOTES:

- PREP ALL EXISTING PTD WOOD COMPONENTS FOR REPAINTING
- ENSURE THAT ALL NEW WOOD TRIM IS BACK-PRIMED PRIOR TO INSTALLATION
- PROVIDE ONE PRIMER COAT AND 2 FINISH COATS OF LATEX PAINT
- SUBMIT PAINT MANUFACTURER TO OWNER FOR APPROVAL PRIOR TO PURCHASING MATERIAL
- CAULK AT ALL WOOD TRIM SHALL BE APPLIED AFTER APPLICATION OF PRIME COAT TO ENSURE BEST BONDING

REV. DATE REVISIONS

**JORDAN-RENSHAW
RESIDENCE**

14526 MacClintock Drive
Glenwood, MD 21738

PROJECT NAME:

PROJECT ADDRESS:

**EXISTING & PROPOSED
ELEVATIONS**

DRAWING NAME:

PERMIT SET

SCALE: AS INDICATED

DATE: 03.08.17 JOB NO.:

DRAWN BY: CHECKED BY:

A2.02



1 PROPOSED REAR ELEVATION
1/4" = 1'-0"

ROOFING NOTES:

- STRIP EXISTING ROOFS TO BARE PLYWD.
- INSPECT & REPLACE DAMAGED ROOF SHEATHING (ADD 165/SHEET)
- PROVIDE UNDERLAYMENT & SELF-ADHERING SHEET UNDERLAYMENT
- PROVIDE CERTAINTED 'LANDMARK' SHINGLES
- PROVIDE ALTERNATE PRICE FOR 'LANDMARK PRO' SERIES SHINGLES
- PROVIDE CONTINUOUS RIDGE VENT
- PROVIDE ALL ACCESSORIES AS RECOMMENDED BY MANUFACTURER
- PROVIDE ALL FLASHINGS, COUNTERFLASHINGS & ACCESSORIES REQUIRED FOR A COMPLETE, WATERTIGHT AND WATERPROOF INSTALLATION. MATERIAL TO BE .019" GAUGE

SIDING NOTES:

- REMOVE EXISTING SIDING & ACCESSORIES
- PROVIDE 'TYVEK' OR EQUIV VAPOR-BARRIER
- PROVIDE CERTAINTED 'MAIN STREET' SIDING STYLE TBD
- PROVIDE CERTAINTED 'INVISVENT' SOFFIT
- ALL VINYL PRODUCT COLORS TBD
- PROVIDE ADD/ALTERNATE PRICE TO UPGRADE TO CERTAINTED MONOGRAM PRODUCT
- PROVIDE ALL ACCESSORIES AS RECOMMENDED BY MANUFACTURER
- PROVIDE ALL FLASHINGS, COUNTERFLASHINGS & ACCESSORIES REQUIRED FOR A COMPLETE, WATERTIGHT AND WATERPROOF INSTALLATION.
- REMOVE EXISTING ALUMINUM WRAP OF EXTERIOR WOOD FINISHES AT EXIST HOUSE. INSTALL NEW .019" PREFINISHED ALUMINUM WRAP AT ALL EXPOSED WOOD TRIM, AND AT AREAS INDICATED ON PERMIT WALKTHROUGH SET, AND APPROVED BY GC AND OWNER
- ALL SCREEN PORCH FINISHING SHALL BE EXCLUDED

SHUTTER NOTES:

- FURNISH VINYL SHUTTERS AT ALL LOCATIONS IDENTIFIED IN PROPOSED ELEVATION DRAWINGS
- STYLE TO BE 'RAISED-PANEL', COLOR TBD.
- SIZE SHUTTERS SO THAT THE COMBINED WIDTH OF A PAIR OF SHUTTERS IS AS CLOSE AS POSSIBLE TO FINISHED WINDOW WIDTH

GUTTER & DOWNSPOUT NOTES:

- PROVIDE 5" 'K-STYLE' FACTORY-FINISHED CONTINUOUS (FORMED IN FIELD) GUTTERS, .017 GAUGE, COLOR TBD
- ATTACH GUTTERS TO FIRMLY-ANCHORED SUPPORTS SPACED NO MORE THAN 24" O.C.
- PROVIDE 4" RECTANGULAR DOWNSPOUTS, SPECS TO MATCH GUTTERS

PAINTING NOTES:

- PREP ALL EXISTING PTD WOOD COMPONENTS FOR REPAINTING
- ENSURE THAT ALL NEW WOOD TRIM IS BACK-PRIMED PRIOR TO INSTALLATION
- PROVIDE ONE PRIMER COAT AND 2 FINISH COATS OF LATEX PAINT.
- SUBMIT PAINT MANUFACTURER TO OWNER FOR APPROVAL PRIOR TO PURCHASING MATERIAL
- CAULK AT ALL WOOD TRIM SHALL BE APPLIED AFTER APPLICATION OF PRIME COAT TO ENSURE BEST BONDING



2 EXISTING REAR ELEVATION
1/4" = 1'-0"

REV. DATE REVISIONS

**JORDAN-RENSHAW
RESIDENCE**

14526 MacClintock Drive
Glenwood, MD 21738

PROJECT NAME:

PROJECT ADDRESS:

DRAWING NAME:

**EXISTING & PROPOSED
ELEVATIONS**

PERMIT SET

SCALE: AS INDICATED

DATE: 03.08.17 JOB NO.:

DRAWN BY: CHECKED BY:

A2.03