

C1 79158

SEQUENCE NO. (MDE USE ONLY)

STATE OF MARYLAND WELL COMPLETION REPORT

THIS REPORT MUST BE SUBMITTED WITHIN 45 DAYS AFTER WELL IS COMPLETED.

COUNTY NUMBER 13

(THIS NUMBER IS TO BE PUNCHED IN COLS. 3-6 ON ALL CARDS)

ST/CO USE ONLY DATE RECEIVED

DATE WELL COMPLETED

DEPTH OF WELL

PERMIT NO. FROM "PERMIT TO DRILL WELL"

OWNER, WELL SITE ADDRESS, SUBDIVISION, SECTION, LOT

WELL LOG

Not required for driven wells

STATE THE KIND OF FORMATIONS PENETRATED, THEIR COLOR, DEPTH, THICKNESS AND IF WATER BEARING

Table with columns: DESCRIPTION, FEET (FROM, TO), check if water bearing. Includes entries for Topsoil, silty sand, silty sand & gravel, grey silt, and 320" HDPE.

GROUTING RECORD

WELL HAS BEEN GROUTED (Y/N), TYPE OF GROUTING MATERIAL (CEMENT, BENTONITE CLAY), NO. OF BAGS, GALLONS OF WATER, DEPTH OF GROUT SEAL

CASING RECORD

MAIN CASING TYPE (PL), Nominal diameter top (main) casing (6 inch), Total depth of main casing (40 feet)

OTHER CASING (if used) diameter, depth (feet)

SCREEN RECORD

screen type or open hole (HO), insert appropriate code below

NUMBER OF UNSUCCESSFUL WELLS: 0

WELL HYDROFRACTURED (Y/N)

CIRCLE APPROPRIATE LETTER: A (Well abandoned and sealed), E (Electric log obtained), P (Test well converted to production well)

I HEREBY CERTIFY THAT THIS WELL HAS BEEN CONSTRUCTED IN ACCORDANCE WITH COMAR 26.04.04 "WELL CONSTRUCTION" AND IN CONFORMANCE WITH ALL CONDITIONS STATED IN THE ABOVE CAPTIONED PERMIT...

DRILLERS LIC. NO. M D 587, DRILLERS SIGNATURE, LIC. NO. A W D 087

SITE SUPERVISOR (sign. of driller or journeyman responsible for sitework if different from permittee)

C 2 DEPTH (nearest ft.)

Table with columns: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

GRAVEL PACK IF WELL DRILLED WAS FLOWING WELL INSERT F IN BOX 68

MDE USE ONLY (NOT TO BE FILLED IN BY DRILLER)

TELESCOPE CASING, LOG INDICATOR, OTHER DATA

C 3 PUMPING TEST

HOURS PUMPED (nearest hour) N/A, PUMPING RATE (gal. per min.) N/A, METHOD USED TO MEASURE PUMPING RATE N/A, WATER LEVEL (distance from land surface) BEFORE PUMPING 17-20 ft, WHEN PUMPING 22-25 ft, TYPE OF PUMP USED (for test) A (air), P (piston), T (turbine), C (centrifugal), R (rotary), O (other), J (jet), S (submersible)

PUMP INSTALLED

DRILLER INSTALLED PUMP (YES/NO), IF DRILLER INSTALLS PUMP, THIS SECTION MUST BE COMPLETED FOR ALL WELLS, TYPE OF PUMP INSTALLED PLACE (A,C,J,P,R,S,T,O) IN BOX 29, CAPACITY: GALLONS PER MINUTE (to nearest gallon) N/A, PUMP HORSE POWER N/A, PUMP COLUMN LENGTH (nearest ft.) N/A, CASING HEIGHT (circle appropriate box and enter casing height) + above, - below, LAND SURFACE 83 (nearest foot)

LATITUDE 39.312509, LONGITUDE 76.797036 (DEFAULT COORD. WGS 84)

Pursuant to §10-624 of the State Govt. Article of the Maryland Code personal info. requested on this form is used in processing this form pursuant to COMAR 26.04.04. Failure to provide the info. may result in this form not being processed. You have the right to inspect, amend, or correct this form. The Maryland Department of the Environment is subject to the Maryland Public Information Act. This form may be made available on the Internet via MDE's website and is subject to inspection or copying, in whole or in part, by the public and other governmental agencies, if not protected by federal or state law.

MB11/26/25

C 1	79156	SEQUENCE NO. (MDE USE ONLY)	STATE OF MARYLAND	THIS REPORT MUST BE SUBMITTED WITHIN 45 DAYS AFTER WELL IS COMPLETED.
1 2 3 6 (THIS NUMBER IS TO BE PUNCHED IN COLS. 3-6 ON ALL CARDS)			WELL COMPLETION REPORT	COUNTY NUMBER <u>13</u>
			FILL IN THIS FORM COMPLETELY PLEASE TYPE	

ST/CO USE ONLY DATE Received MM <u>11</u> DD <u>25</u> YY <u>25</u>	DATE WELL COMPLETED MM <u>10</u> DD <u>02</u> YY <u>25</u>	Depth of Well <u>22</u> <u>320</u> <u>26</u> (TO NEAREST FOOT)	PERMIT NO. FROM "PERMIT TO DRILL WELL" <u>40-25-00478</u>
8 13	15 20		28 29 30 31 32 33 34 35 36 37

OWNER Gozman last name 2209 Fairlins Ct first name Felix TOWN Ellicott City

WELL SITE ADDRESS Hickfield Estates SECTION _____ LOT 43

WELL LOG
Not required for driven wells

STATE THE KIND OF FORMATIONS PENETRATED, THEIR COLOR, DEPTH, THICKNESS AND IF WATER BEARING

DESCRIPTION (Use additional sheets if needed)	FEET		check if water bearing
	FROM	TO	
TOP soil	0	1	
Silty Sand	1	35	
grey sh. st	35	320	✓
* install 320 HDPE Leo loop			

GROUTING RECORD

WELL HAS BEEN GROUTED (Circle Appropriate Box) **Y** **N**

TYPE OF GROUTING MATERIAL (Circle one)
CEMENT **CM** BENTONITE CLAY **BC**

NO. OF BAGS 14 NO. OF POUNDS 200

GALLONS OF WATER _____

DEPTH OF GROUT SEAL (to nearest foot)
from 0 ft. to 320 ft.
(enter 0 if from surface)

CASING RECORD

casing types insert appropriate code below

ST STEEL **CO** CONCRETE
PL PLASTIC **OT** OTHER

MAIN CASING TYPE **PL** Nominal diameter top (main) casing (nearest inch) 6 Total depth of main casing (nearest foot) 40

60 61 63 64 66 70

OTHER CASING (if used)

diagram diameter depth (feet) from to

E A C H I N G

SCREEN RECORD

screen type or open hole (insert appropriate code below)

ST STEEL **BR** BRASS **HO** OPEN HOLE
PL PLASTIC **OT** OTHER

NUMBER OF UNSUCCESSFUL WELLS: 0

WELL HYDROFRACTURED **Y** **N**

CIRCLE APPROPRIATE LETTER

A A WELL WAS ABANDONED AND SEALED WHEN THIS WELL WAS COMPLETED

E ELECTRIC LOG OBTAINED

P TEST WELL CONVERTED TO PRODUCTION WELL

I HEREBY CERTIFY THAT THIS WELL HAS BEEN CONSTRUCTED IN ACCORDANCE WITH COMAR 26.04.04 "WELL CONSTRUCTION" AND IN CONFORMANCE WITH ALL CONDITIONS STATED IN THE ABOVE CAPTIONED PERMIT, AND THAT THE INFORMATION PRESENTED HEREIN IS ACCURATE AND COMPLETE TO THE BEST OF MY KNOWLEDGE.

DRILLERS LIC. NO. 1 M D 587

Stephen D. Dosh

DRILLERS SIGNATURE (MUST MATCH SIGNATURE ON APPLICATION)

LIC. NO. 1 D 287

SITE SUPERVISOR (sign. of driller or journeyman responsible for sitework if different from permittee)

C 2 DEPTH (nearest ft.)

1 40 2 320

E	8	9	11	15	17	21
A						
C	23	24	26	30	32	36
H						
S						
C	38	39	41	45	47	51
R						
E						
S						
L						
O						
N						

DIAMETER OF SCREEN (NEAREST INCH) 56 60

from _____ to _____

GRAVEL PACK IF WELL DRILLED WAS FLOWING WELL INSERT F IN BOX 68 _____ 68

MDE USE ONLY (NOT TO BE FILLED IN BY DRILLER)

T _____ (E.R.O.S.) W Q _____

70 _____ 72 _____ 74 75 76 _____

TELESCOPE CASING LOG INDICATOR OTHER DATA

C 3

PUMPING TEST

HOURS PUMPED (nearest hour) N/A

PUMPING RATE (gal. per min.) N/A

METHOD USED TO MEASURE PUMPING RATE N/A

WATER LEVEL (distance from land surface)

BEFORE PUMPING N/A ft.

WHEN PUMPING N/A ft.

TYPE OF PUMP USED (for test)

A air **P** piston **T** turbine
C centrifugal **R** rotary **O** other (describe below)
J jet **S** submersible

PUMP INSTALLED

DRILLER INSTALLED PUMP (CIRCLE) (YES OR NO) YES **O**

IF DRILLER INSTALLS PUMP, THIS SECTION MUST BE COMPLETED FOR ALL WELLS.

TYPE OF PUMP INSTALLED PLACE (A,C,J,P,R,S,T,O) IN BOX 29. 29

CAPACITY: GALLONS PER MINUTE (to nearest gallon) N/A 31 35

PUMP HORSE POWER N/A 37 41

PUMP COLUMN LENGTH (nearest ft.) N/A 43 47

CASING HEIGHT (circle appropriate box and enter casing height)

+ above } LAND SURFACE 03 (nearest foot)
- below }

LATITUDE 39 31 25.26

LONGITUDE 76 70 02

(DEFAULT COORD. WGS 84)

Pursuant to §10-624 of the State Govt. Article of the Maryland Code personal info. requested on this form is used in processing this form pursuant to COMAR 26.04.04. Failure to provide the info. may result in this form not being processed. You have the right to inspect, amend, or correct this form. The Maryland Department of the Environment is subject to the Maryland Public Information Act. This form may be made available on the Internet via MDE's website and is subject to inspection or copying, in whole or in part, by the public and other governmental agencies, if not protected by federal or state law.

OR 11/26/25

C 1 79157 SEQUENCE NO. (MDE USE ONLY) STATE OF MARYLAND WELL COMPLETION REPORT THIS REPORT MUST BE SUBMITTED WITHIN 45 DAYS AFTER WELL IS COMPLETED.

1 2 3 6 (THIS NUMBER IS TO BE PUNCHED IN COLS. 3-6 ON ALL CARDS) COUNTY NUMBER 13

ST/CO USE ONLY DATE Received MM DD YY 11 03 25 DATE WELL COMPLETED MM DD YY 10 02 25 Depth of Well 22 480 26 (TO NEAREST FOOT) PERMIT NO. FROM "PERMIT TO DRILL WELL" H0-25-0048

OWNER Guzman last name Felix first name WELL SITE ADDRESS 2201 Katling Ct Hillfield Estates TOWN ELICOTT CITY 43 SUBDIVISION SECTION LOT 43

WELL LOG Not required for driven wells

STATE THE KIND OF FORMATIONS PENETRATED, THEIR COLOR, DEPTH, THICKNESS AND IF WATER BEARING

Table with columns: DESCRIPTION (Use additional sheets if needed), FEET (FROM, TO), check if water bearing. Rows include: Topsoil (0-1), Silty sand (1-25), Silty sand w/ gravels (25-35), Grey Shist (35-480), * install 480' HDPE LOOP.

GROUTING RECORD yes no Y N WELL HAS BEEN GROUTED (Circle Appropriate Box)

TYPE OF GROUTING MATERIAL (Circle one) CEMENT CM BENTONITE CLAY BC NO. OF BAGS 18 NO. OF POUNDS 45 46 312 45 46 900 GALLONS OF WATER DEPTH OF GROUT SEAL (to nearest foot) from 0 48 TOP 52 ft. to 480 54 BOTTOM 58 ft. (enter 0 if from surface)

CASING RECORD casing types insert appropriate code below MAIN CASING TYPE PL Nominal diameter top (main) casing (nearest inch)! 6 Total depth of main casing (nearest foot) 480

OTHER CASING (if used) diameter inch depth (feet) from to

SCREEN RECORD screen type or open hole insert appropriate code below ST BR HO STEEL BRASS OPEN HOLE PL PLASTIC OTHER

NUMBER OF UNSUCCESSFUL WELLS: 0 WELL HYDROFRACTURED yes Y no N

CIRCLE APPROPRIATE LETTER A A WELL WAS ABANDONED AND SEALED WHEN THIS WELL WAS COMPLETED E ELECTRIC LOG OBTAINED P TEST WELL CONVERTED TO PRODUCTION WELL

I HEREBY CERTIFY THAT THIS WELL HAS BEEN CONSTRUCTED IN ACCORDANCE WITH COMAR 26.04.04 "WELL CONSTRUCTION" AND IN CONFORMANCE WITH ALL CONDITIONS STATED IN THE ABOVE CAPTIONED PERMIT, AND THAT THE INFORMATION PRESENTED HEREIN IS ACCURATE AND COMPLETE TO THE BEST OF MY KNOWLEDGE.

DRILLERS LIC. NO. 1 M D 584 DRILLERS SIGNATURE (MUST MATCH SIGNATURE ON APPLICATION) LIC. NO. 1 AU D 083

SITE SUPERVISOR (sign. of driller or journeyman responsible for sitework if different from permittee)

C 2 DEPTH (nearest ft.) 1 2 H0 40 480 3 4 5 6 7 8 9 11 15 17 21 23 24 26 30 32 36 38 39 41 45 47 51 SLOT SIZE 1 2 3 DIAMETER OF SCREEN (NEAREST INCH) 56 60 from to

GRAVEL PACK IF WELL DRILLED WAS FLOWING WELL INSERT F IN BOX 68

MDE USE ONLY (NOT TO BE FILLED IN BY DRILLER) T (E.R.O.S.) W Q 70 72 74 75 76 TELESCOPE CASING LOG INDICATOR OTHER DATA

C 3 PUMPING TEST

HOURS PUMPED (nearest hour) 8 9 PUMPING RATE (gal. per min.) 11 15 METHOD USED TO MEASURE PUMPING RATE WATER LEVEL (distance from land surface) BEFORE PUMPING 17 20 ft. WHEN PUMPING 22 25 ft. TYPE OF PUMP USED (for test) A air P piston T turbine C centrifugal R rotary O other (describe below) J jet S submersible

PUMP INSTALLED DRILLER INSTALLED PUMP (CIRCLE) (YES OR NO) YES NO

IF DRILLER INSTALLS PUMP, THIS SECTION MUST BE COMPLETED FOR ALL WELLS. TYPE OF PUMP INSTALLED PLACE (A,C,J,P,R,S,T,O) IN BOX 29. CAPACITY: GALLONS PER MINUTE (to nearest gallon) 31 35 PUMP HORSE POWER 37 41 PUMP COLUMN LENGTH (nearest ft.) 43 47 CASING HEIGHT (circle appropriate box and enter casing height) + above - below LAND SURFACE (nearest foot) 03

LATITUDE 39.312519 LONGITUDE 76.797617 (DEFAULT COORD. WGS 84)

Pursuant to §10-624 of the State Govt. Article of the Maryland Code personal info. requested on this form is used in processing this form pursuant to COMAR 26.04.04. Failure to provide the info. may result in this form not being processed. You have the right to inspect, amend, or correct this form. The Maryland Department of the Environment is subject to the Maryland Public Information Act. This form may be made available on the Internet via MDE's website and is subject to inspection or copying, in whole or in part, by the public and other governmental agencies, if not protected by federal or state law.

MB 11/26/25

B 1 93750 SEQUENCE NO. (MDE USE ONLY) **STATE OF MARYLAND APPLICATION FOR PERMIT TO DRILL WELL** please type **STATE PERMIT NUMBER** HO - 25 - 0048 ✓

1 2 3 6 **B 3** LOCATION OF WELL

Date Received (APA) **OWNER INFORMATION** **Howard** COUNTY **Hollifield Estates I SI** SUBDIVISION **Ellicott City** NEAREST TOWN

8 MM DD YY 13 **Guzman** Last Name **Felix O** First Name **2209 Kaitlins Ct.** Street or RFD **Ellicott City Md. 21043** Town State Zip

DRILLER INFORMATION **Stephen Delosh** Driller's Name **MWD 587** License No. **Coanally & Associates, Inc.** Firm Name **1513 Tilco Dr. Frederick, Md. 21704** Address **Stephen DeRoth 9-2-2025** Signature Date

B 4 SOURCES OF DRILLING WATER **2209 Kaitlins Ct.** STREET ADDRESS **public** ON WHICH SIDE OF ROAD (CIRCLE APPROPRIATE BOX) **9/22/25 - onsite @ 2pm. the rig was set up. over/above the bores but the back was down. no driller onsite.** **92** DISTANCE FROM ROAD ENTER FT OR MI **FT 38 39** TAX MAP: **0018** BLK: **---** PARCEL: **0001**

B 2 WELL INFORMATION **APPROX. PUMPING RATE (GAL. PER MIN.)** **N/A** **AVERAGE DAILY QUANTITY NEEDED (GAL. PER DAY)** **N/A** **USE FOR WATER (CIRCLE APPROPRIATE BOX)** **C** CLOSED LOOP GEOTHERMAL **NOT TO BE FILLED IN BY DRILLER HEALTH DEPARTMENT APPROVAL** **Howard** COUNTY NAME **13** COUNTY NO. **9/18/25** DATE ISSUED **9/18/26** EXP. DATE **Don: 9/22/25 @** **DOG: 10/1/25 @**

APPROXIMATE DEPTH OF WELL **480** FEET **APPROXIMATE DIAMETER OF WELL** **6** NEAREST INCH **METHOD OF DRILLING (circle one)** **AIR-PERCussion** **REPLACEMENT OR DEEPEMED WELLS (CIRCLE APPROPRIATE BOX)** **N** THIS WELL WILL NOT REPLACE AN EXISTING WELL **PERMIT NUMBER OF WELL TO BE REPLACED OR DEEPEMED (IF AVAILABLE)** **41** **52** **Not to be filled in by driller (MDE OR COUNTY USE ONLY)** **APPROX. PERMIT NUMBER** **G** **PERMIT No. HO - 25 - 0048** **SPECIAL CONDITIONS** **grout bores from bottom to top.**

PROPOSED LOCATION OF WELL ON LOT SHOW PERMANENT STRUCTURES SUCH AS BUILDINGS, SEPTIC SYSTEM, ROADS AND/OR LANDMARKS AND INDICATE NOT LESS THAN TWO DISTANCE MEASUREMENTS TO WELL

Pursuant to § 10-624 of the State Govt. Article of the Maryland Code, personal info requested on this form is used in processing this form pursuant to COMAR 26.04.04. Failure to provide the info may result in this form not being processed. You have the right to inspect, amend, or correct this form. The Maryland Department of the Environment is subject to the Maryland Public Information Act. This form may be made available on the Internet via MDE's website and is subject to inspection or copying, in whole or in part, by the public and other governmental agencies, if not protected by federal or State Law.

Building Restriction Lines:

Front....20'
Sides....7.5'
Rear.....25'

Storm Drain

10' Public Tree Maintenance Easement

Exiting home in front

Public Water & Sewer lines marked by professional Surveyor Kaitlins

Court

L=64.07'
R=70.00'

L=15.84'
R=30.00'

Lot 42

N 36°26'34" W
106.38'

N 57°22'39" E
64.30'

Lot 43

N 32°33'33" W
135.38'

Lot 44

2 Story Brick + Frame #2209

Macadam

Well sites OK
9/18/25 IPF

DO NOT REMOVE THIS TAG
DEPARTMENT OF THE ENVIRONMENT
WELL PERMIT NUMBER

HO-25-0048

INFORMATION GIVE NUMBER AND WRITE
1800 WASHINGTON BLVD
BALTIMORE, MARYLAND 21230

HO-25-0048

The purpose of this drawing is to locate, describe, and represent the positions of buildings and substantial improvements affecting the property shown hereon, being known as:

Lot 43, Section One,
HOLLIFIELD ESTATES I

recorded among the land records of Howard County, Maryland in Plat 14382

PREPARED FOR:



SAGE TITLE GROUP

THE WISE CHOICE

This is page one of a two page document. The advice found on the affixed page is an integral part of this drawing, and is not valid without all pages.



James Carl Hudgins
Property Line Surveyor #96
Expiration Date: 3/11/18

LOCATION DRAWING
2209 Kaitlins Court
2nd ELECTION DISTRICT
HOWARD COUNTY, MARYLAND

NTT Associates, Inc.

16205 Old Frederick Rd.
Mt. Airy, Maryland 21771
Phone: (410) 442-2031
Fax: (410) 442-1315
www.nttsurveyors.com

Scale: 1" = 30'

Date: 1-29-18

Field By: DR

Drawn By: DR

File No.: 223203HIRS

Page No.: 1 of 2



100 ft

-76.796306, 39.3

Connelly & Associates
1513 Tilco Drive
Frederick, MD 21704
301.696.8820



I, Felix Guzman, who resides at 2209 Katlins Court, Ellicott City MD 21043 have instructed and informed Connelly & Associates Drilling Services that I have the permission of my neighbors who reside at 2213 Kaitlins Ct. to use part of their lot for access so that Connelly's well rig and equipment can have entrance to my property. I understand that I will be responsible for any damage or repairs to said neighbor's property which includes, but is not limited to grass, shrubs, sidewalks, etc. I have discussed this with my neighbor and have assured Connelly that I have been given such authority by my neighbors at the property address listed above.


I am instructing Connelly that I assume all responsibilities and cost for any damages which occur as a result of Connelly's equipment.

Signed:  Date: 07/29/2025

Printed: Felix O. Guzman

Neighbor: William J. Burch Date: 8/4/25
Signed

Printed: William J. Burch Date: 8/4/25






1513 Tilco Drive · Frederick, Maryland 21704
301-696-8820 · www.connellyandassociates.com

August 08, 2025

Mr. Felix Guzman
2209 Kaitlins Ct.
Ellicott City, Md. 21043

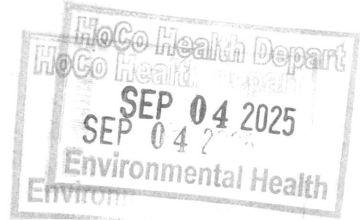

RE: Geothermal Variance Request

To whom this may concern,

Please accept this letter of request and agreement between both Mr. Guzman and Connelly & Associates, Inc. on this 8th day of August 2025 as a written request for the authorization and issuance of a variance for two geothermal closed loop wells on the above stated address. Two geothermal well locations do not meet the county code setback regulation regarding geothermal well installation on private properties, specifically a building structure setback. Please review the attached state well permit application and well location plan for this location. All county enforced setbacks can be achieved, except for the building structure which places both geothermal wells # 1 & 3 less than 20 feet from the home. Geo well #1 is located 16 feet from home and Geo well #3 is located 15 feet from home.

After evaluating the property site with the homeowner, it has been determined the locations of two wells can only be achieved with an approved variance in the location on the attached property site survey and well location plan. Connelly & Associates, Inc. has discussed with Mr. Guzman the potential risk associated with home/property damage in this request and has agreed that Connelly & Associates, Inc. will provide the best approach and drilling techniques moving forward to mitigate those risks during the installation of these geothermal wells.

Sincerely,

Stephen DeLosh
Project Manager – MWD-587
301-696-8820 x112 (o)
240-367-7925 (c)

Property Owner

Signature:

Date:


08/08/2025

C/A

Signature:

Date:

08/08/2025

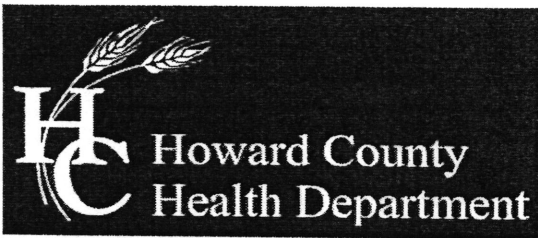

Bureau of Environmental Health

8930 Stanford Boulevard, Columbia, MD 21045

Main: 410-313-2640 | Fax: 410-313-2648

TDD 410-313-2323 | Toll Free 1-866-313-6300

www.hchealth.org

Facebook: www.facebook.com/hocohealth

Twitter: HowardCoHealthDep

Dr. Maura J. Rossman, M.D., Health Officer

TO ALL INTERESTED PARTIES

When submitting a well permit application for a proposed well for new construction, please indicate one of the following:

Well Site Location:


Hollifield Estates 181 43 Kaitlins Ct.
Subdivision/Property Name Lot # Road Name

The well site has been staked by Connelly & Associates, Inc.
(professional land surveyor or company employing professional land surveyors)
on _____ (date) and does not require a site inspection.

The well driller, builder or property owner will call the Health Department to schedule a time to meet in the field to verify the proposed well site location.

This sheet, along with two copies of an acceptable well site plan, must be attached to the green well permit application.

Guzman Residence: 2209 Kaitlins Ct. Ellicott City, Md. 21043 Geothermal Closed Loop

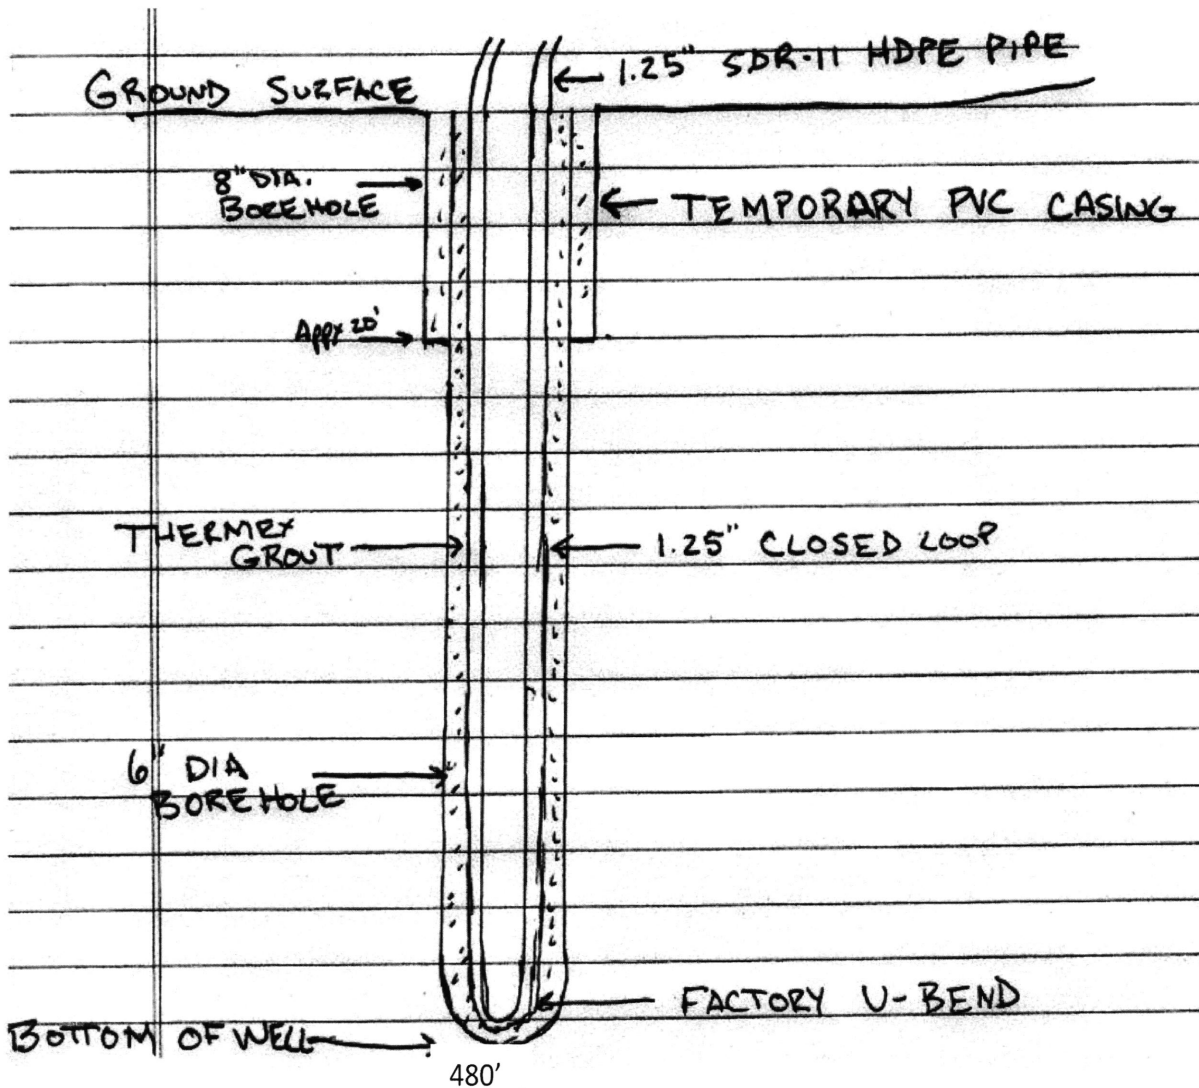

Grout information for this property is as follows:

Well Grout DF grout mixture of 50 lb. grout to 19 gallons water, placed in the well using the tremie method, from bottom to top.